

Ideal Touch Fanless Touch Panel PCs

Fanless Touch Panel PC powered by Intel® ATOM™ 1.6GHz CPU and featured variety I/O interface for industrial applications

X-PPC 752 / X-PPC 722 / X-PPC 708



FEATURES

- Built-in Intel® ATOM™ low power consumption and high performance solutions.
- Fanless all-in-one industrial Panel PC grade products fits in any critical environments.
- 8.4" / 12.1" / 15" TFT LCD with 5-wire resistive touch panel for friendly interface.
- Ultra compact design with VESA mounting for smart space management at anyplace.



X-PPC 708
Fanless, silent, reliable and compact size design



X-PPC 722
Pole ARM moutable with VESA standard



X-PPC 752
Support attached customer display



X-PPC 752 MSR

Specifications

Model Name		X-PPC 752	X-PPC 722	X-PPC 708
Main Board	CPU	Intel® Atom™ Processor N270 1.6GHz		
	Core Logic	Intel 945GSE / ICH7-M		
	System Memory	SO-DIMM DDR2, 128MB up to 2GB		
	OS Support	Windows® XP / XPe, WEPOS, WinCE*, Linux*, POSready, Vista, Windows 7		
Display	TFT LCD Size	15"	12.1"	8.4"
	Brightness	250 nits	200 nits	220 nits
	Resolution	1024 x 768	800x600	800x600
	Touch Screen	5 wire resistive type		
Storage Device	DOM	1 x IDE 40pins		
	HDD	1 x 2.5" HDD Drive Bay		N/A
	Compact Flash	1 x slot compact flash typell		
I/O Ports	Serial	3 x RS-232 COM 1 : RS-232/422/485, DB-9, Pin9 w/ RI/5V/12V Selectable by BIOS COM 2 / 5 : DB-9, Pin9 w/ RI/5V/12V Selectable by BIOS		2 x RS-232 COM 1 : RS-232/422/485,DB-9, Pin9 w/ RI/5V/12V Selectable by BIOS COM 2 : DB-9, Pin9 w/ RI/5V/12V Selectable by BIOS
	Parallel	1 x DB25		N/A
	USB	4 x USB 2.0		2 x USB 2.0
	PS/2 Keyboard / Mouse	1 x Mini-DIN		
	LAN	1 x Gigabit Ethernet by RJ-45 , Support Wake on LAN		
	Cash Drawer	1 x RJ11		
	Audio	2W Speaker x 2		
	VGA	1 x [2x5] 2.54mm pin header		
Others	Wall mount	Support VESA Mount		
	Power Input	External adapter,80Watt, 12VDC input		
	Color	Black		
	Material	Plastic / Aluminum		
	EMC& Safety Compliance	FCC / CE / WEEE / RoHS / CCC / CB	FCC / CE / WEEE / RoHS	
	Weight	4.91 Kgs	3.63 Kgs	1.66 Kgs
	Dimension WxDxH (mm)	365 x 60 x 289	313 x 55 x256	234 x 42 x 185
	Operating Temperature	0°C ~ 35°C		
	Storage Temperature	-20°C ~ 60°C		
	Humidity	20% - 80% RH, non-condensing		

* Please contact supplier for detail information.

Ordering information

Main Unit

Part No.	Description
XPPC72-5B-A16G	Fanless Panel PC w/ 15" TFT LCD, Intel® ATOM™ N270 1.6GHz CPU
XPPC72-2B-A16G	Fanless Panel PC w/12.1" TFT LCD,Intel® ATOM™ N270 1.6GHz CPU
XPPC72-8B-A16G	Fanless Panel PC w/8.4" TFT LCD,Intel® ATOM™ N270 1.6GHz CPU

Optional Accessories (X-PPC 752)


Part No.	Description
Z1300059	LCM Attached Display
Z0500002	MSR-Front Type, 3 Tracks PS/2 Type
Z0500003	MSR-Side Type, 3 Tracks PS/2 Type
Z0500004	MSR-Side Type & Finger Print
Z0500005	MSR-Side Type & i-Button, PS/2 Type
Z0500006	MSR-Side Type & RFID
A0400807	Wireless LAN: IEEE 802.11 B/G, USB

Part No.	Description
20600018	Compact Flash: 512MB
20600005	Compact Flash: 1GB
20600023	Compact Flash: 2GB
20600024	Compact Flash: 4GB
20600033	Compact Flash: 8GB
20900001	OS License: Windows XP Professional, English Version
20900002	OS License: WEPOS, English Version
20300021	Memory: DDR2-667, 512MB, 200PIN, SO-DIMM
20300023	Memory: DDR2-667, 1GB, 200PIN, SO-DIMM
20300024	Memory: DDR2-667, 2GB, 200PIN, SO-DIMM
20200023	2.5" Slim Type HD: 160GB SATA TYPE


Specifications are subject to change without notice. Issue Date: 2009/10

Dimension & I/O ports


X-PPC 752

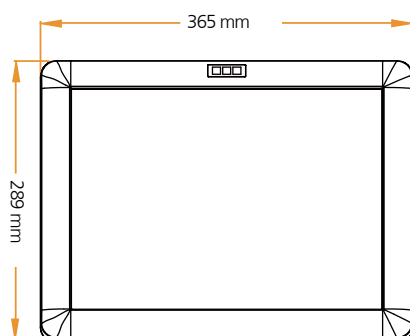


60 mm




X-PPC 722

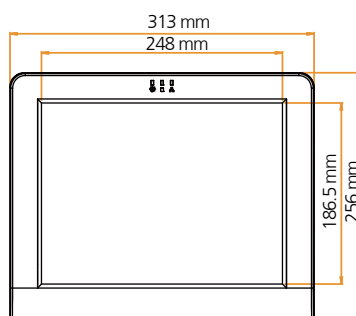





60 mm
55 mm



X-PPC 708



42 mm

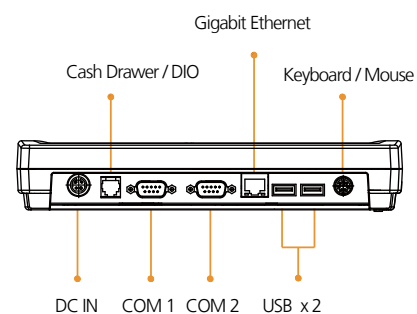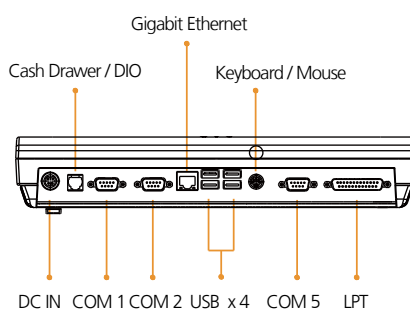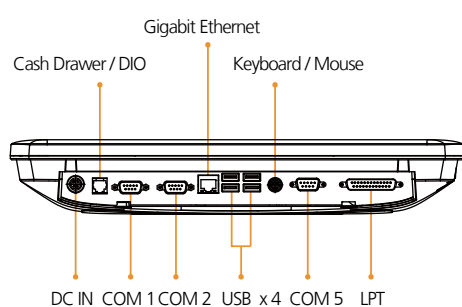

EBN
EBN Technology Corp.

EBN Technology Corp.

10F, No. 90, Sec. 1, Sintai 5th Rd., Sijhih City,
Taipei County 221, Taiwan
TEL : +886-2-2696 9292
FAX : +886-2-2696 9393
E-mail : sales@ebn-pos.com
www.ebn-pos.com